




GA-KLACK

GA-KLACK

Input Power	LED-Module	Color Consistency	Installation Type	Material	Lumen Maintenance	Beam Angles	Luminaire Color
220 – 240V	Philips 1208 940 PW HE	2-Step MacAdam	Nordic Aluminium Global Trac 3-Circuit Tracks	Powder Painted Die-Cast Aluminum	50 000h L80 B10	S 15° NFL 3d18° FL 3d28° WFL 35° VWFL 3d50°	White (RAL 9016) Black (RAL 9005)

Forward Current	COB Type	System Luminous Flux	System Power	Lm/W
350mA	1208 930 PW HE+	1.820Lm	13,91	130.8
350mA	1208 935 PW HE+	1.849Lm	13,91	132.9
350mA	1208 940 PW HE+	1.870Lm	13,91	134.4
550mA	1208 930 PW HE+	2.812Lm	21,40	131.4
550mA	1208 935 PW HE+	2.840Lm	21,40	132.7
550mA	1208 940 PW HE+	2.872Lm	21,40	134.2
750mA	1208 930 PW HE+	3.729Lm	29,43	126.7
750mA	1208 935 PW HE+	3.785Lm	29,43	128.6
750mA	1208 940 PW HE+	3.828Lm	29,43	130.1

Technical Dimensions:

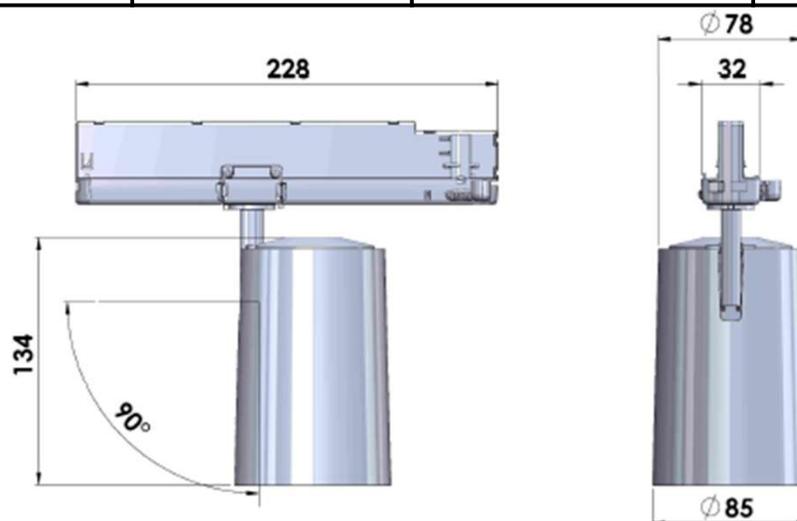

IP20

LED Design | Made In Finland

LIVAL