





#### Features

- · Plastic housing with class II design
- · Built-in active PFC function
- Standby power consumption < 0.5W
- · IP67 rating for indoor or outdoor installations
- Function options: 3 in 1 dimming (dim-to-off);
   Auxiliary DC output
- Typical lifetime >50000hours
- 5 years warranty


# Applications

- · LED panel lighting
- LED downlight
- · LED decorative lighting
- Moving sign
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location

## Description

NPF-120D series is a 120W AC/DC LED driver featuring the constant current mode output. NPF-120D operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40°C~+90°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-120D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

# ■ Model Encoding

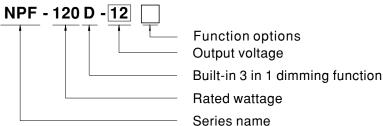

Type	IP Level	Function	Note
Blank	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
BE	IP67	3 in 1 dimming function and Auxiliary DC output	In Stock



#### **SPECIFICATION**


MODEL			NPF-120D-12	NPF-120D-15	NPF-120D-20	NPF-120D-24	NPF-120D-30	NPF-120D-36	NPF-120D-42	NPF-120D-48	NPF-120D-54		
VDLL	RATED CURF	RENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A		
	RATED POW		120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W		
OUTPUT		RRENT REGION	·	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V		
	CURRENT RIPPLE			@rated curre	-	17.7 270	10 000	21.0 001	20.2 424	20.0 401	02.4 047		
	CURRENT TOLERANCE		±5.0%										
	AUXILIARY DC OUTPUT		Nominal 12V(deviation 11.4~12.6V)@0.2A for BE-Type only										
	SET UP TIME Note.3		500ms/115VAC, 230VAC										
	VOLTAGE RANGE Note.2		90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)										
INPUT	FREQUENCY RANGE		47 ~ 63Hz										
	POWER FACTOR (Typ.)		$PF \ge 0.97/115VAC$ , $PF \ge 0.96/230VAC$ , $PF \ge 0.94/277VAC$ @full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)										
	TOTAL HARMONIC DISTORTION		THD<20%(@load≧60%/115VC, 230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)										
	EFFICIENCY	BLANK-TYPE	87.5%	88%	89%	89.5%	89%	89.5%	89.5%	90%	90%		
	(Typ.)	BE-TYPE(Note.5)	87.5%	87.5%	88.5%	89%	88.5%	89%	89%	89%	89%		
	AC CURREN	T (Typ.)	1.3A / 115V	AC 0.65	5A / 230VAC	0.55A/2	277VAC						
	INRUSH CUR	INRUSH CURRENT(Typ.)		COLD START60A(twidth=520µs measured at 50% lpeak) at 230VAC; Per NEMA 410									
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER		4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC										
	LEAKAGE CURRENT		<0.25mA / 277VAC										
	STANDBY POWER CONSUMPTION		<0.5W										
PROTECTION	OVER CURRENT		95 ~ 108%										
			Constant current limiting, recovers automatically after fault condition is removed										
	SHORT CIRCUIT		Hiccup mode, recovers automatically after fault condition is removed   15 ~ 17V   17.5 ~ 21V   23 ~ 27V   28 ~ 34V   34 ~ 40V   41 ~ 46V   46 ~ 54V   54 ~ 60V   59 ~ 66V										
	OVER VOLTAGE		15 ~ 17V			28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V		
			Shut down o/p voltage, re-power on to recover										
	OVER TEMPE	-	Shut down o/p voltage, re-power on to recover										
ENVIRONMENT	WORKING TEMP.		Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)										
	MAX. CASE TEMP.		Tcase=+90°C 20 ~ 95% RH non-condensing										
	WORKING HUMIDITY												
	TEMP. COEFFICIENT		±0.03%/C (0~40°C)										
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes										
	VIDRATION		UL8750(type"HL"), CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13, EN62384 independent, EAC TP TC 004,										
	SAFETY STANDARDS		GB19510.1,GB19510.14,IP67 approved; Design refer to EN60335-1										
SAFETY &	WITHSTAND	VOLTAGE	I/P-O/P:3.75KVAC										
EMC	ISOLATION R	RESISTANCE	I/P-O/P:10	0M Ohms / 5	00VDC / 25°C	C/ 70% RH							
	EMC EMISSION		Compliance to EN55015, EN61000-3-2 Class C (@ load ≥ 60%); EN61000-3-3; GB17743 and GB17625.1, EAC TP TC 020										
	EMC IMMUNITY Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level(surge immunity Line-									Line 2KV);EA	C TP TC 020		
OTHERS	MTBF		877.8K hrs min. Telcordia SR-332 (Bellcore); 233.9K hrs min. MIL-HDBK-217F (25°C)										
	DIMENSION		191*63*37.5mm (L*W*H)										
	PACKING		0.97Kg; 15pcs/15.6Kg/0.87CUFT										
NOTE		•	ally mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.										

- 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 4. The Auxiliary DC output is defined between AUX+ and DIM-.
- 5. The efficiency for BE-Type is measured when the Auxiliary DC output is 100% loaded at 12V, 0.2A.
- 6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 7. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.
- 8. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a>
- 9. The ambient temperature derating of  $3.5^{\circ}$ C/1000m with fanless models and of  $5^{\circ}$ C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 10. For any application note and IP water proof function installation caution, please refer our user manual before using.  $https://www.meanwell.com/Upload/PDF/LED\_EN.pdf$




## ■ BLOCK DIAGRAM

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

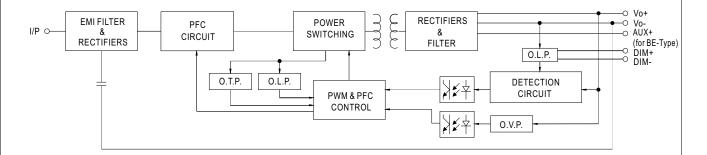

## ■ DRIVING METHODS OF LED MODULE

\* This series works in constant current mode to directly drive the LEDs.

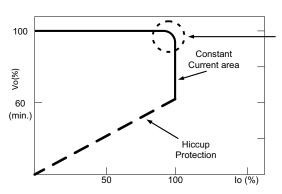

Typical LED power supply I-V curve


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

please refer to Mechanical Specification




#### **■ DIMMING OPERATION**




#### 3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 0 ~ 10VDC

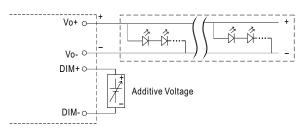


"DO NOT connect "DIM- to Vo-"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

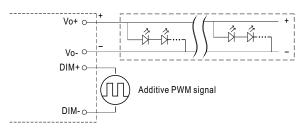



"DO NOT connect "DIM- to Vo-"


O Applying additive resistance:

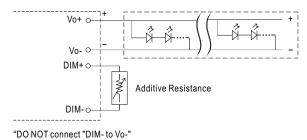

DO NOT connect Dim to vo








Note : 1. Min. dimming level is about 6% and the output current is not defined when 0% I out <6%.


- 2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.
- ※ Auxiliary DC operation (for BE-type)
- AUX+, with mark \*\*\*, is added for BE-Type, used as the Auxiliary DC output with respect to DIM-.



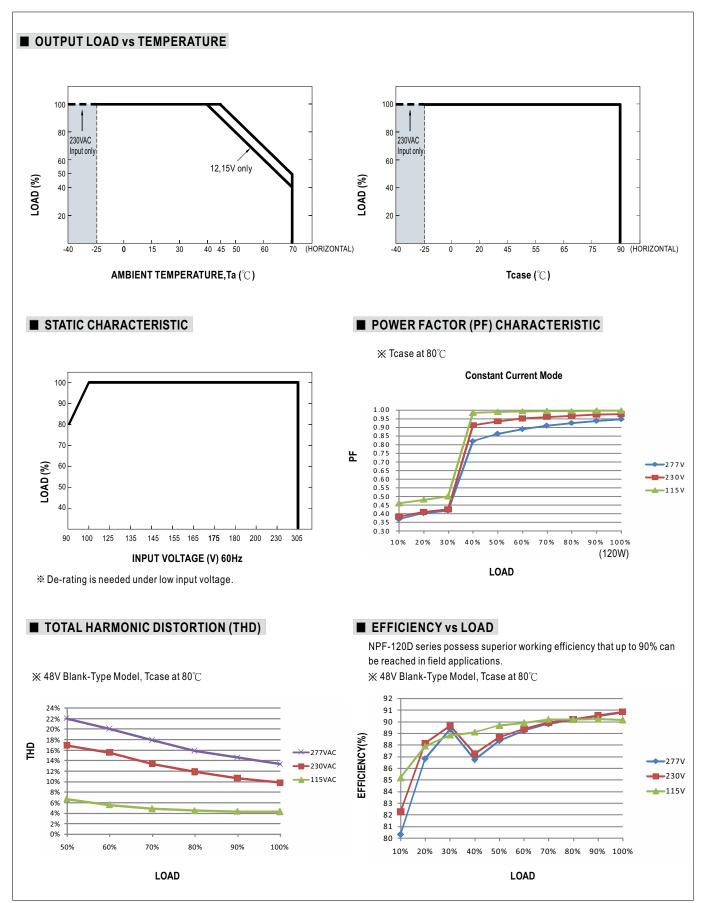



## **■** LIFE TIME

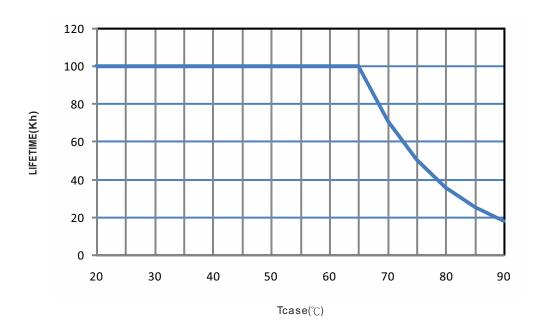






## ■ MECHANICAL SPECIFICATION

Case No. PWM-120


Unit:mm

※ Blank-Type

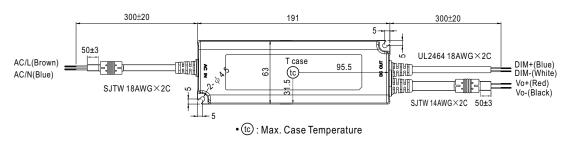



#### **※** BE-Type

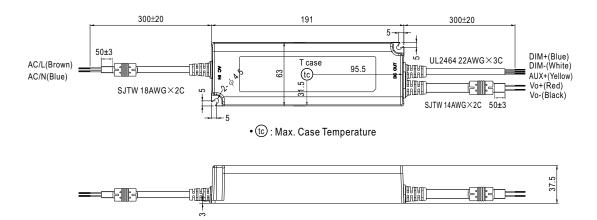

## ■ INSTALLATION MANUAL

Please refer to:http://www.meanwell.com/manual.html